

Flap Disc POLIFAN®-CURVE

The unique disc for work on fillet welds



New!
Type SGP CURVE-ALU



- Precise and optimum grinding out of fillet welds
- Excellent tool life and form stability
- High stock removal performance through unrivalled fast, aggressive grinding

POLIFAN® Flap Discs

Special Line SGP



POLIFAN®-CURVE is a PFERD innovation for work on fillet welds.

Alongside the SGP ZIRKON-CURVE and SGP CO-CURVE versions, PFERD is now offering this high performance tool as a SGP CURVE-ALU for aluminium processing.

The unique radial construction shape (PFR) has unique advantages for any difficult and demanding work on fillet welds due to its special flap design arrangement:

- Unequaled quick and highly abrasive grinding due to high stock removal, and therefore substantial savings on labour costs.
- Precise and optimum grinding out of fillet welds.
- Dimensional stability for high-quality work results.

- Excellent tool life when working on fillet welds.
- Optimum use of the grinding material on the radius.

Recommendation for use:


The best results are achieved on high-performance angle grinders.

Type M for fillet weld radii > 5 mm


Type L for fillet weld radii > 8 mm

PFERDERGONOMICS recommends the flap discs POLIFAN®-CURVE as an innovative tool solution for hard and rough jobs.


For further information and suitable PFERD tools see the brochure "PFERDERGONOMICS – The focus is on people".



Vibration Filter



Noise Filter



Emission Filter



Haptic Filter

Steel/INOX Type SGP ZIRKON-CURVE



High-power tool in the SGP ZIRKON-CURVE PFERD version for demanding grinding work with particularly high machining capacity.

Abrasive: Zirconia alumina Z

Grit size: 40

Workpiece materials:

Steel, stainless steel (INOX)


Application:

Fillet weld grinding, chamfering, deburring



Order No.	EAN 4007220	Grit size	Fillet weld width	D x T x H [mm (Inch)]	Max. speed [RPM]		
Radial type PFR							
N! PFR 115 Z 40 SGP-CURVE M/22,23	821671	40	> 5 mm	115 x 14 x 22,23 (7/8)	13.300	10	0,800
N! PFR 115 Z 40 SGP-CURVE L/22,23	821695	40	> 8 mm	115 x 16 x 22,23 (7/8)	13.300	10	1,050
PFR 125 Z 40 SGP-CURVE M/22,23	790151	40	> 5 mm	125 x 14 x 22,23 (7/8)	12.200	10	1,055
PFR 125 Z 40 SGP-CURVE L/22,23	790175	40	> 8 mm	125 x 16 x 22,23 (7/8)	12.200	10	1,225



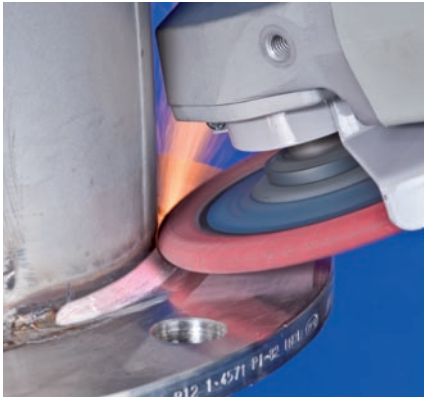



High-power tool in the SGP CO-CURVE PFERD version for demanding grinding work, especially for achieving fine surface finishes. The ceramic grit guarantees extremely cool grinding on poor heat-conducting materials, which means optimum grinding results without thermal damage to workpiece.

Abrasive: Ceramic oxide CO
Grit size: 60

Workpiece materials:
Stainless steel (INOX), steel

Application:
Fillet weld grinding, chamfering, deburring

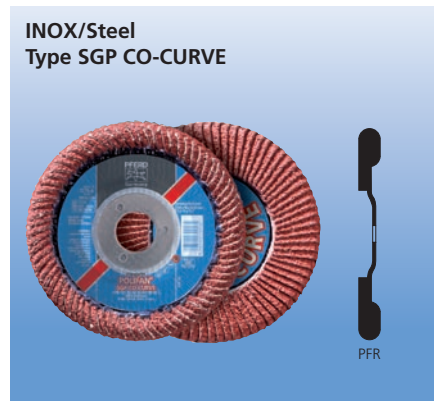

Order No.	EAN 4007220	Grit size	Fillet weld width	D x T x H [mm (Inch)]	Max. speed [RPM]		
Radial type PFR							
N! PFR 115 CO 60 SGP-CURVE M/22,23	827444	60	> 5 mm	115 x 14 x 22,23 (7/8)	13.300	10	0,800
N! PFR 115 CO 60 SGP-CURVE L/22,23	827451	60	> 8 mm	115 x 16 x 22,23 (7/8)	13.300	10	1,050
N! PFR 125 CO 60 SGP-CURVE M/22,23	790168	60	> 5 mm	125 x 14 x 22,23 (7/8)	12.200	10	1,050
N! PFR 125 CO 60 SGP-CURVE L/22,23	790182	60	> 8 mm	125 x 16 x 22,23 (7/8)	12.200	10	1,250




High-power tool in the SGP ZIRKON-CURVE-ALU PFERD version for demanding grinding work. Especially for work on aluminium. Operates without tool loading problems, even on soft, greasing materials.



Contains no fillers that might leave undesirable residues on the aluminium workpiece. The ground surface can be welded right away, without any further treatment.

Abrasive: Aluminium oxide A
Grit size: 40

Workpiece materials:
Aluminium, non ferrous metals

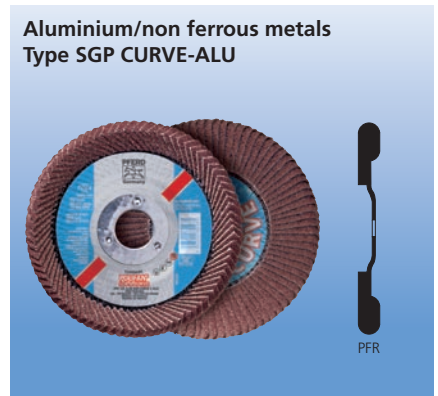Application:
Fillet weld grinding, chamfering, deburring



Order No.	EAN 4007220	Grit size	Fillet weld width	D x T x H [mm (Inch)]	Max. speed [RPM]		
Radial type PFR							
N! PFR 115 A 40 SGP-CURVE L ALU/22,23	851968	40	> 8 mm	115 x 16 x 22,23 (7/8)	13.300	10	0,800
N! PFR 125 A 40 SGP-CURVE L ALU/22,23	851975	40	> 8 mm	125 x 16 x 22,23 (7/8)	12.200	10	1,050



The original PFERD Tool Manual!

With more information on POLIFAN® flap discs and more than 7,500 innovative solutions for surface processing and cutting materials.

Request your own free personal copy at www.pferd.com

Germany



August Rüggeberg
GmbH & Co. KG
PFERD-Werkzeuge
Hauptstraße 13
51709 Marienheide
Tel. + 49 (0) 22 64 - 90
Fax + 49 (0) 22 64 - 9400
www.pferd.com

Domestic Sales

vertrieb-deutschland@pferd.com

Sales Europe

sales-europe@pferd.com

Sales International

sales-international@pferd.com

Argentina



PFERD Latinoamerica S.R.L.
Pacheco de Melo 2095 Piso 6 B
1126 Ciudad Autónoma
de Buenos Aires
Tel. + 54 - 9 11 - 40 41 41 28
contacto@pferdla.com

Australia



PFERD Latinoamerica S.R.L.
Pacheco de Melo 2095 Piso 6 B
1126 Ciudad Autónoma
de Buenos Aires
Tel. + 54 - 9 11 - 40 41 41 28
contacto@pferdla.com

Belgium



bvba PFERD-Rüggeberg sprl
Waterranonkelstraat 2 a
Rue de la Grenouillette
1130 Brussel - Bruxelles
Tel. + 32 - 2 - 2 47 05 90
Fax + 32 - 2 - 2 16 30 54
info@pferd.be

Brasil



PFERD-Rüggeberg do Brasil Ltda.
BR 277 no. 4.654 km 2 - CIC
82305-200 Curitiba - PR
Tel. + 55 - 41 - 30 71 82 22
Fax + 55 - 41 - 30 71 82 00
pferd@pferd.com.br

China



PFERD-Tools – Shanghai Office
Kong Jiang Road No. 1688
Wei Bai Xin Bldg
6th, Floor, Room 608
Yang Pu District
200092 Shanghai
Tel. + 86 - 21 - 51 15 70 99
Fax + 86 - 21 - 51 15 70 66
info@pferd.cn

France



PFERD-Rüggeberg France S.A.R.L.
Zone d'Activités Economiques
2, Avenue de la Concorde
Ernolsheim-sur-Bruche
67129 Molsheim Cédex
Tel. + 33 - 3 88 - 49 72 50
Fax + 33 - 3 88 - 38 70 17
info@pferd.fr

UK



PFERD LTD.
4 Westleigh Hall, Wakefield Road
Denby Dale
West Yorkshire HD8 8QJ
Tel. + 44 - 14 84 - 86 61 49
Fax + 44 - 14 84 - 86 59 38
info.uk@pferd.com

Italy



PFERD-Italia s.r.l.
Via G. Di Vittorio 33/7-9
20068 Peschiera Borromeo (MI)
Tel. + 39 - 02 - 55 30 24 86
Fax + 39 - 02 - 55 30 25 18
info@pferd.it

Canada



PFERD of Canada
5570 McAdam Rd.
Mississauga, Ontario L4Z 1P1
Tel. + 1 - 905 - 501 - 1555
Fax + 1 - 905 - 501 - 1554
sales@pferdcanada.ca

Mexico



PFERD-FANDELI, S.A. de C.V.
Av. Presidente Juárez Núm. 225
Col. San Jerónimo Tepetlalcalco
Tlalnepantla, Estado de México
C. P. 54090 - México
Tel. + 52 - 55 - 53 66 - 14 00
Fax + 52 - 55 - 53 66 - 14 44
servicio@fandeli.com.mx

Netherlands



PFERD-Rüggeberg B.V.
Hekven 15 bis., Postbus 2070
4824 AD/4800 CB Breda
Tel. + 31 - 76 - 5 93 70 90
Fax + 31 - 76 - 5 42 10 33
info@pferd.nl

Austria



PFERD-Rüggeberg GmbH
Prinz-Eugen-Straße 17
4020 Linz
Tel. + 43 - 7 32 - 79 64 11-0
Fax + 43 - 7 32 - 79 64 22
info@pferd-rueggeberg.at

Poland



PFERD-VSM Sp.z o.o.
ul. Polna 1A
62-025 Kostrzyn Wilkp.
Tel. + 48 - 61 - 8 97 04 80
Fax + 48 - 61 - 8 97 04 90
pferdvsm@pferdvsm.pl

Sweden



PFERD-VSM AB
Dalénum 37
Dalénum Hus 224
181 70 Lidingsö
Tel. + 46 - 8 - 564 72 300
Fax + 46 - 8 - 564 72 301
info@pferd-vsm.se

Switzerland



PFERD-VITEX (Schweiz) AG
Werkzeuge und Schleifmittel
Zürichstrasse 38b
Postfach 22
8306 Brüttsellen
Tel. + 41 - 44 - 805 28 28
Fax + 41 - 44 - 805 28 00
info@pferd-vitex.ch

Singapore



PFERD-Asia Pacific Pte. Ltd.
808, French Road
#03-179, Kitchener Complex
Singapur 200808
Tel. + 65 - 62 96 53 93
Fax + 65 - 62 96 43 83
sales-international@pferd.com

Spain



PFERD-Rüggeberg S.A.
C/ Júndiz 18
Pol. Ind. Júndiz
01015 Vitoria-Gasteiz
Tel. + 34 - 9 45 - 18 44 00
Fax + 34 - 9 45 - 18 44 18
pferd@pferd.es

South Africa



PFERD-South Africa (Pty) Ltd.
32 Derrick Road
P.O. Box 588
Kempton Park, 1620
Spartan, Kempton Park
Tel. + 27 - 11 - 2 30 40 00
Fax + 27 - 11 - 3 94 12 32
info@pferd.co.za

Turkey



PFERD Asindirici Takimler Ltd. Sti.
Aydintepe Mah.
Sahilyolu Cad. 25 - 7/D
34959 Tuzla Istanbul
Tel. + 90 - 216 494 03 00
Fax: + 90 - 216 494 22 11
info@pferd.com.tr

USA



PFERD INC.
PFERD Milwaukee Brush Co.
30 Jytek Drive
Leominster, MA 01453
Tel. + 1 - 978 - 840 - 6420
Fax + 1 - 978 - 840 - 6421
sales@pferdusa.com