



Tiger



PERSONAL FALL PROTECTION BEAM ANCHORS

Tiger Beam Anchors are used as anchorage connectors for personal fall arrest systems & meet the requirements of SANS 50795 and EN 795

Designed to be attached to Horizontal I-Beams with an attached personal fall arrest system jaw sliding clamp can also be attached to vertical I-Beams.

(full body safety harness, shock absorbing lanyard or fall arrest block). The Tiger single Minimum breaking strength 22.3kN

Designed for one person use only with a maximum capacity of 140kg

Model Number

FABASJ

Single Jaw Sliding
Fixed Beam Anchor



Model Number

FABADJ


Two Jaw Sliding
Fixed Beam Anchor



Model Number

FABART

Mobile Two Jaw Sliding
Mobile Beam Anchor

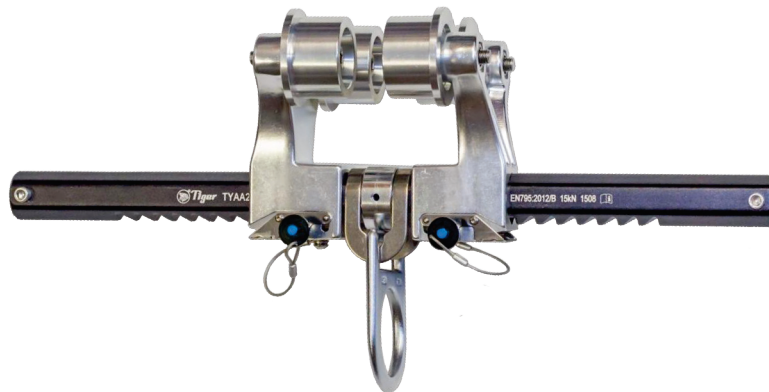

Technical Data

| Product Code | Description | Beam Flange Size | Length (mm) | Height (mm) | Width (mm) | Weight (kg) |
|--------------|---|------------------|-------------|-------------|------------|-------------|
| FABASJ45 | Fixed Type Single-Jaw Sliding Horizontal & Vertical Beam Use | 63.5 - 450mm | 684 | 209 | 76 | 2.83 |
| FABADJ45 | Fixed Type Two-Jaw Sliding Horizontal Beam Use | 63.5 - 450mm | 643 | 199 | 76 | 2.22 |
| FABART45 | Mobile (rolling) Type Two-Jaw Sliding Horizontal Beam Use | 63.5 - 450mm | 643 | 239 | 140 | 3.28 |

Beam Anchors for larger beams available on request